


AMPCO'S WINE AND MUST CART

Featuring Ampco's ZP1 Series pump

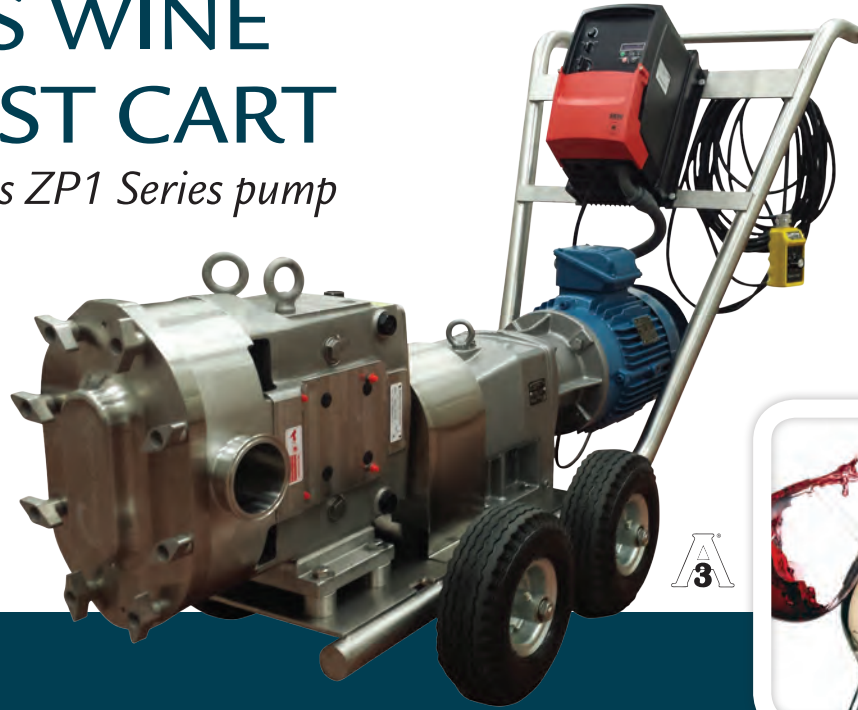

Typical applications:

- Wine/Juice Transfer
- Barrel Work
- Filter Feed
- Bottling/Filler Supply

Standard Pump Features:

- 316L stainless steel wetted parts with Alloy 88 non-galling rotors
- 304 stainless steel gearcase
- Single o-ring seals
- Tri-clamp connections
- Bearing protection package
- High efficiency TEFC motors with 20:1 turndown ratio

Common Pump and Motor Options:

- Single and double mechanical seals
- Multiple connection options
- Washdown and stainless steel motor enclosures
- NEMA or IEC motor frames

Control Features:

- NEMA 4X VFD
- Remote speed potentiometer
- Membrane control with digital display
- Wash-down approved wiring, cord and plug options are available upon request

Cart Features:

- 304 stainless steel construction
- 10" foam filled tires with greaseable roller bearings

Model	Inlet / Outlet size	Motor	Flow / Max	Pressure / Max
WC-30	1.5"	2 HP / 1.5 kW	30 gpm / 7 m ³ /h	60 psi / 4 bar
WC-40	2"	3 HP / 2.2 kW	40 gpm / 9 m ³ /h	60 psi / 4 bar
WC-60	2.5"	5 HP / 4 kW	70 gpm / 16 m ³ /h	80 psi / 5.5 bar
WC-130	3"	7.5 HP / 5.5 kW	135 gpm / 31 m ³ /h	80 psi / 5.5 bar

Contact Ampco's technical sales team for additional options.
sales@ampcopumps.com / 800.737.8671

Ampco Pumps Company
 2045 W. Mill Road
 Glendale, WI 53209
 Phone: 800.737.8671
sales@ampcopumps.com

Ampco Pumps Company

www.ampcopumps.com



Ampco Pumps GmbH
 Am Gäxwald 6
 76863 Herxheim Germany
 Phone: +49 7276 5058515
info@ampcopumps.de